

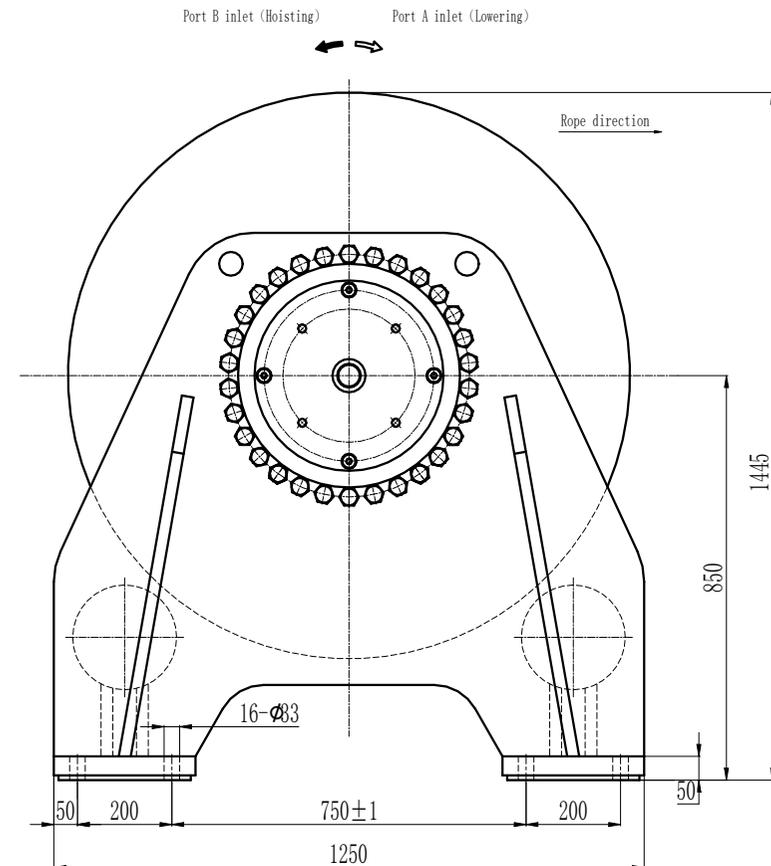


05ZJZ7-Z-059-9E-05Z-00E-17E1-091-0S3H

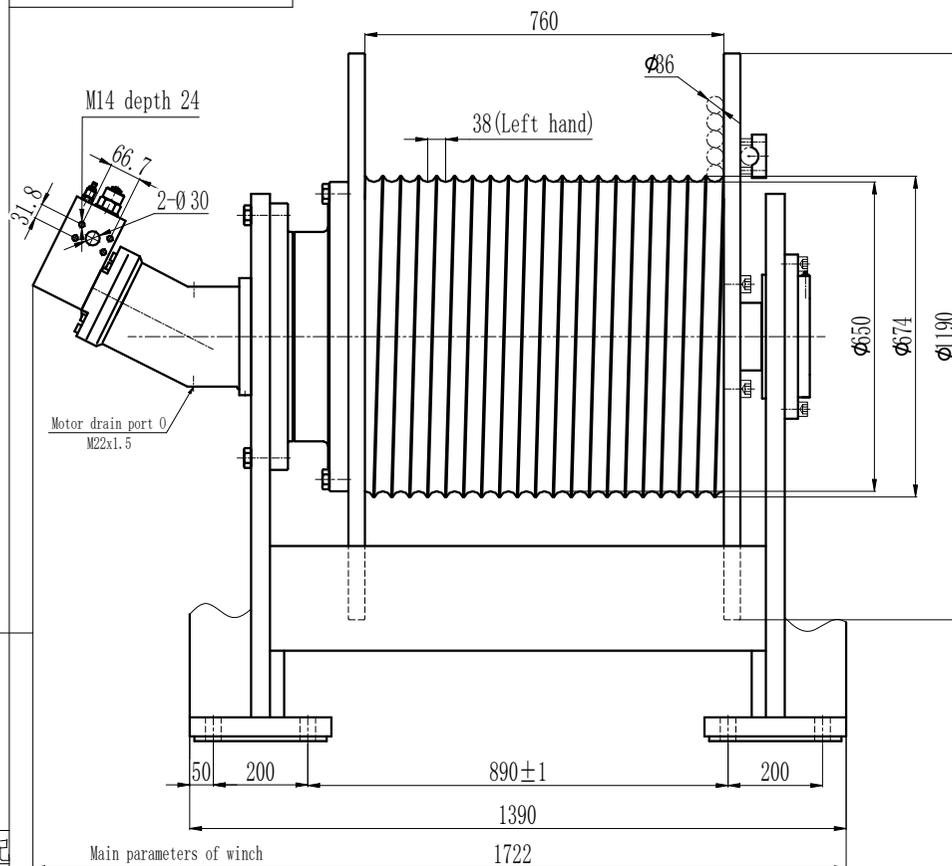

借通用件登记

第一层工作拉力 (kN) 1st layer working pull force	300
第一层绳速 (m/min) 1st layer rope speed	20
总排量 (ml/r) Total displacement	33525
系统额定压力 (MPa) System rated pressure	25
液压马达工作压力差 (MPa) Motor working pressure differ.	23.5
适用钢丝绳直径 (mm) Rope diameter	36
钢丝绳层数 Layers of rope	5
卷筒容量 (m) Drum capacity	250
系统理论流量 (L/min) Theoretical flow of pump	338 (ηv=0.92)
液压马达型号 Hydraulic motor model	L2F250W5Z1
行星减速机型号 Gearbox model	FFT160W3-B134.1
制动器开启压力 (MPa) Release pressure of brake	2-2.5
设计标准 Design standard	FEM M5-L5-T2



Note  
1. Steel specification: Q355D  
2. Operating temperature: -20~+45°C  
3. Bearing brand: HRB/ZWZ/LYC

设计	审核	工艺	标准化	标记	处数	更改文件号	签字	日期	图样标记	重量	比例	NingBo Flag-up Transmission CO., LTD. <b>300kN Ladder winch</b> HCS0-160-134.1-300-250-36-650-Z-12F250
								2025/12/16			1:10	
										版本号	视角	84010452.1