

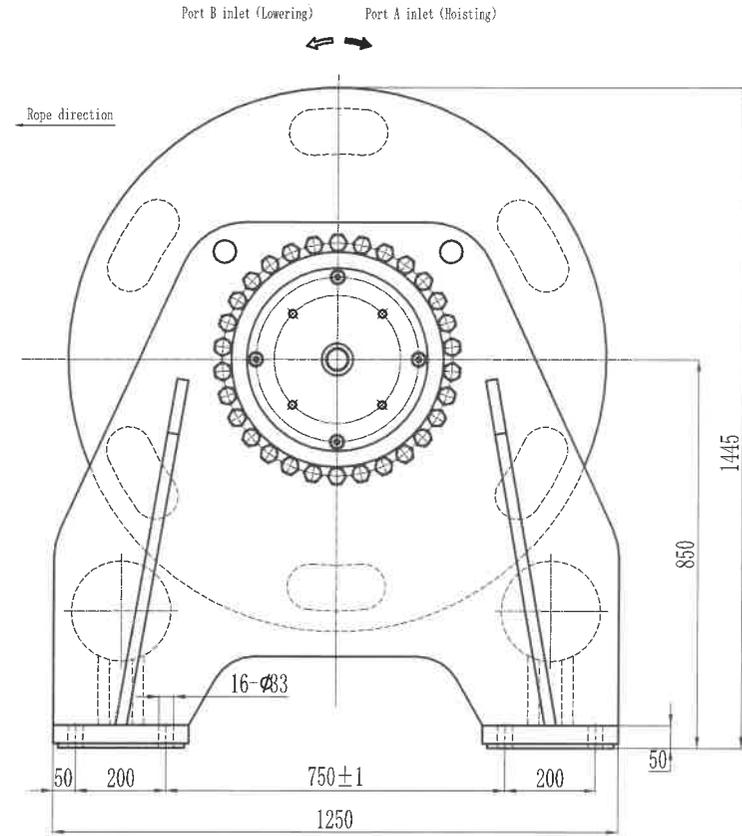


05ZJ71-059-9E-05Z-00E-1.33E1-091-QS2H

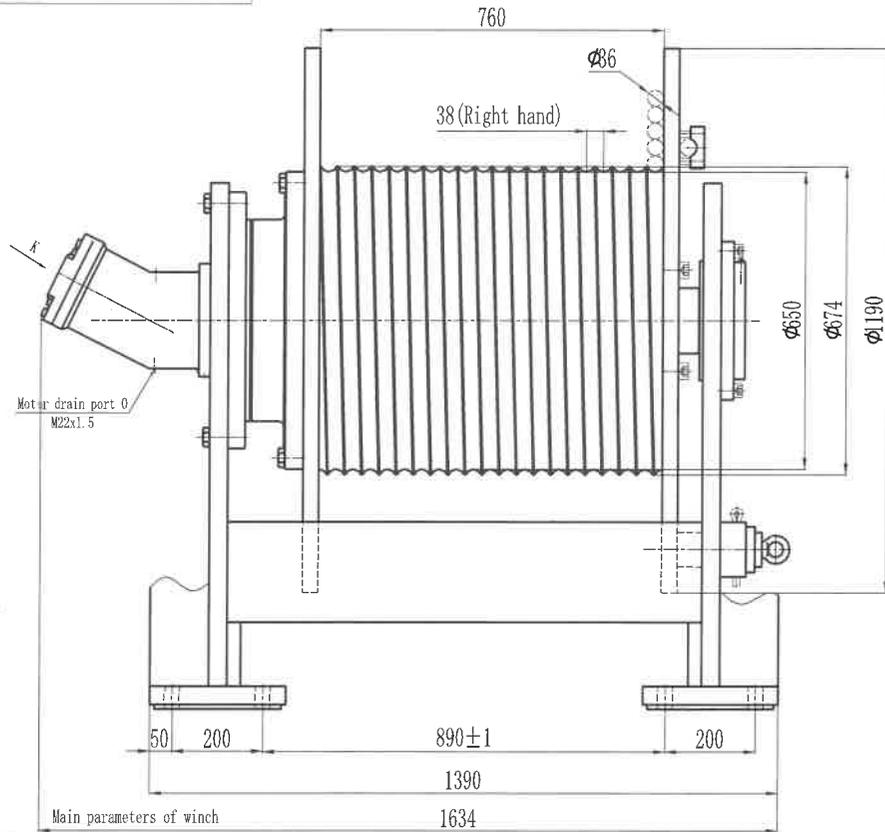

借通用件登记

第一层工作额定力 (kN)	300
1st layer working full force	300
第一层转速 (r/min)	20
1st layer rope speed	20
总容量 (mL/r)	33275
Total displacement	33275
系统额定压力 (MPa)	25
System rated pressure	25
液压系统工作压力 (MPa)	23.5
Motor working pressure differ.	23.5
适用钢丝绳直径 (mm)	36
Rope diameter	36
钢丝绳层数	5
Layers of rope	5
滚筒容量 (m)	250
Drum capacity	250
理论流量 (L/min)	336 ( $\eta_v=0.92$ )
Theoretical flow of sumu	336 ( $\eta_v=0.92$ )
液压马达型号	L2P250W5Z1
Hydraulic motor model	L2P250W5Z1
行星减速机型号	FFT160W3-133.1
Gearbox model	FFT160W3-133.1
制动器额定压力 (MPa)	
Release pressure of brake	
设计标准	FEM M5-L5-72
Design standard	FEM M5-L5-72

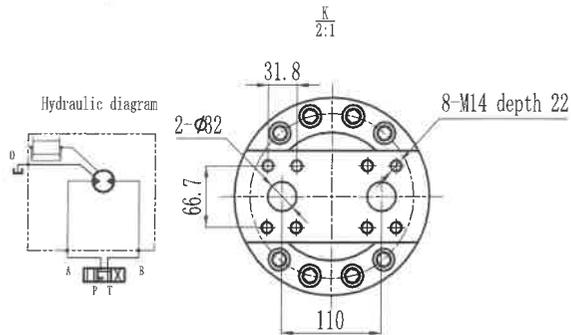

Note  
 1. Steel specification: Q355D  
 2. Operating temperature: -20~+45°C  
 3. Bearing brand: HRB/ZWZ/LYC

标记处数	更改文件号	签字	日期	图样标记	重量	比例
设计	批准					1:10
审核						视角
工艺						
标准化	日期	2025/12/16	版本号			

NingBo Flag-up Transmission CO., LTD.  
 flag-up

300kN Swing winch

HCSJ-160-133.1-300-250-36-650-L2P250

84010453L.1