
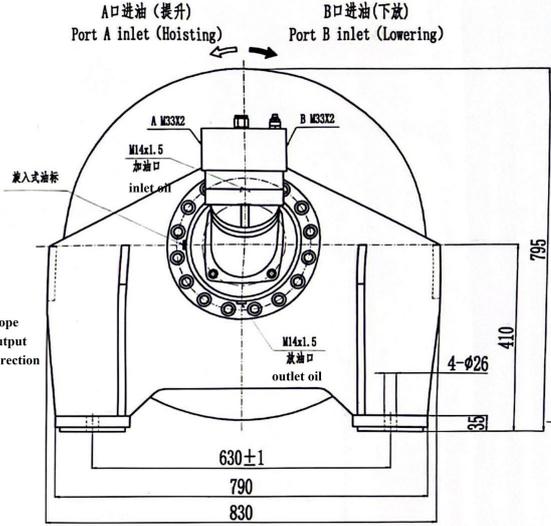


FJ36-75-80-2P-A2FM56

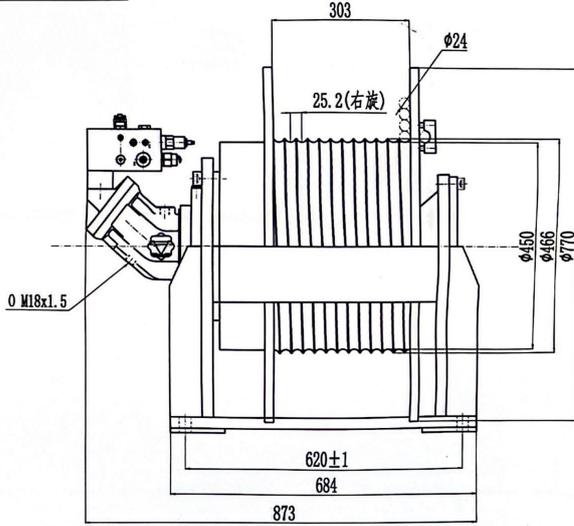


借通用件登记

Technical datasheet

第一层线速 (m/min)	75
第一层线速 (m/min)	25
总排量 (ml/r)	7369.6
电机工作压力差 (MPa)	18.5
绳径 (mm)	24
绳层数	4
印成圈数	80
系统理论流量 (L/min)	135 (η v=0.92)
液压马达型号	A2FM56
减速机型号	FFT36W3-B131.6
静态制动力矩 (N.m)	750
制动释放压力 (MPa)	1.8-2.5

Hydraulic Symbol



Instructions

1. The output direction of the gearbox is opposite to the input direction.
2. When installing the gearbox, try to place the oil drain plug at the lower end as much as possible to facilitate oil drainage.
3. The screws used to connect the rack and gearbox must be coated with anaerobic fastening adhesive and tightened to the specified torque.
4. If the motor connecting bolt is disassembled, please apply anaerobic fastening glue to the thread and tighten it again according to the specified torque;
5. The motor drain port should be directly connected back to the oil tank, and other circuits are not allowed to be connected.

设计	批准	图样标记	重量	比例
审核				1:7
工艺				1:7
标准化	日期 2025/12/25	版本号		视角

Kingdo Flag-up Transmission (U), LTD.  
  
**7.5T winch**  
**FJ36-75-80-2P-A2FM56**  
**84010466**