



M-05Z-LWGJ-00071-EZB-Z17ZHH

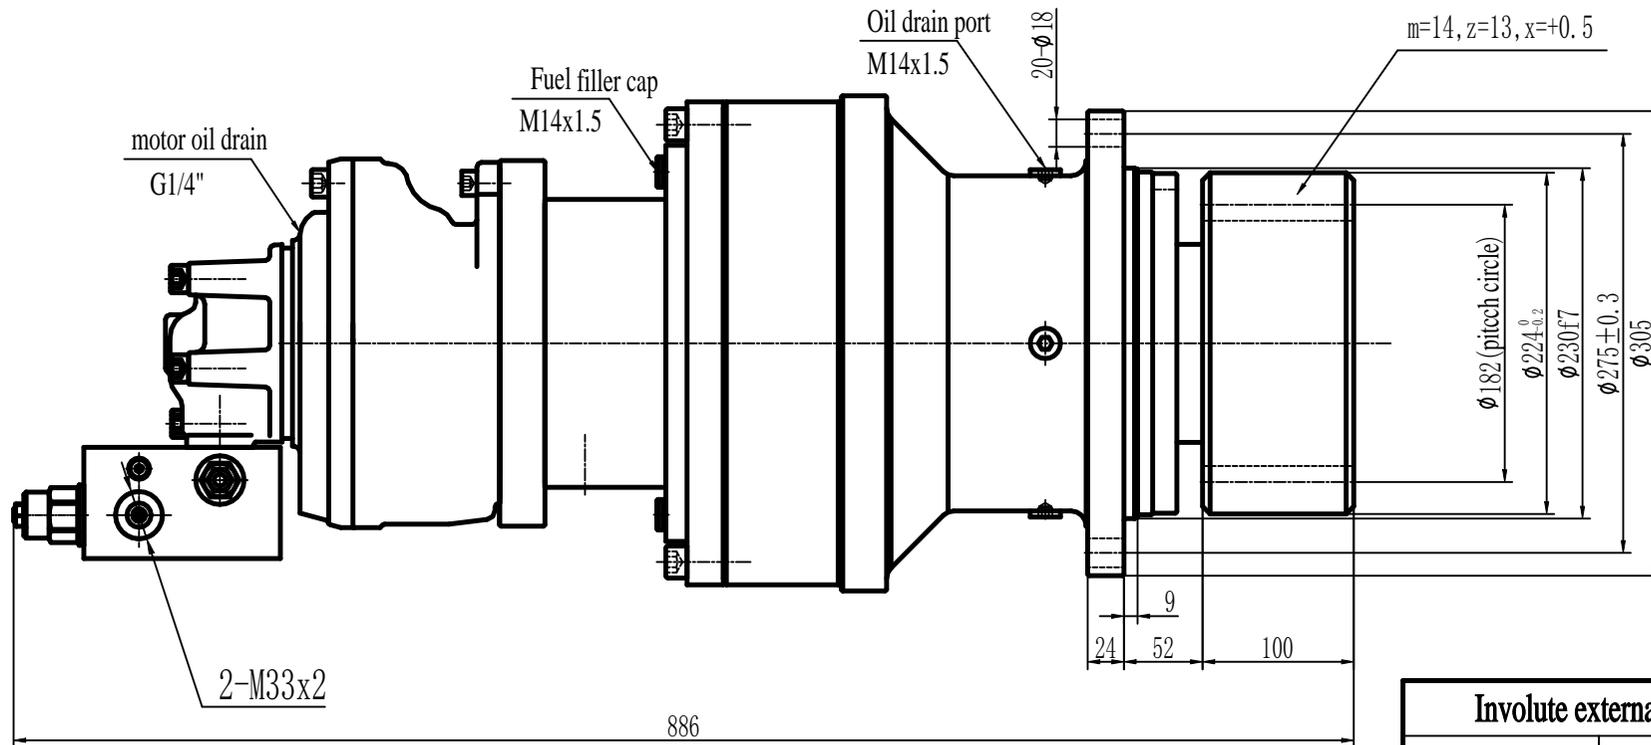

Involute external gear parameters		
Module	m	14
Number of teeth	Z	13
Pressure angle	α	20°
Displacement factor	x	+0.5
Accuracy grade	GB10095-88 8级	
Helix angle	β	0°
Number of teeth spanning the test	k	3
Common normal length	W	110.662 ^{-0.11} _{-0.18}

Technical sheet

借通用件登记	Rated Output Torque (NM)	14000
插图	max output torque(NM)	17000
校核	Output speed(r/min)	7
旧版图总号	Total displacement (ml/r)	5589
签字	Working Pressure Difference(MPa)	20
日期	Braking torque(NM)	890
	Brake opening pressure(Mpa)	2-2.5
	Hydraulic motor model:	FGM1-250ID47
	Planetary gearbox model:	FHZ24T2-B23
	System flow rate:(L/min)	44 ($\eta_v=0.92$)
	Lubricating oil grade and amount added (L)	L-CKD220 (6)

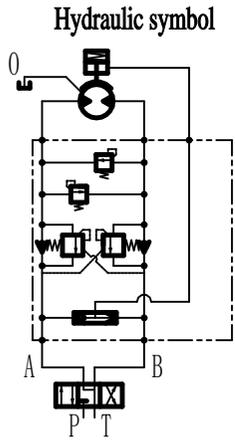

设计	审核	工艺	标准化	标记处数	更改文件号	签字	日期	图样标记	重量	比例
							2025/9/4			1:3.5
										视角


 宁波弗莱格传动有限公司
 Ningbo Flag-up transmission Co.,Ltd
Slewing drive
 FHZ24T2-B23-14000-FGM1-250-W
 84020222