


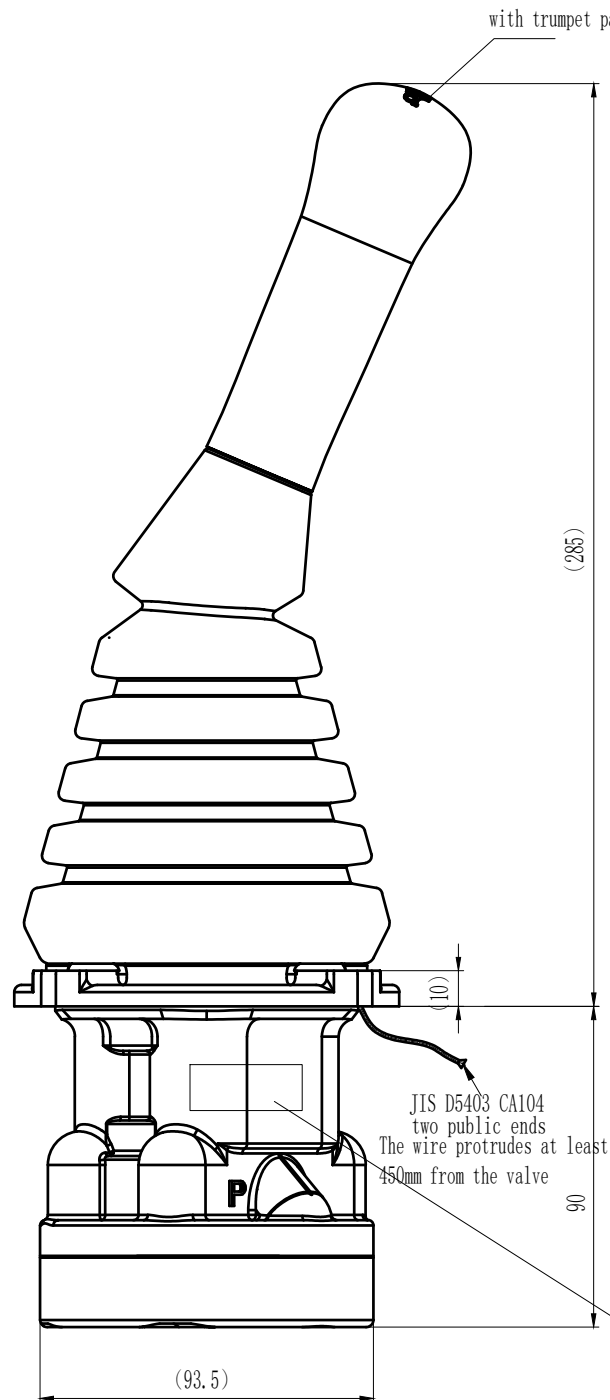


with trumpet pattern

JIS D5403 CA104
two public ends
The wire protrudes at least
450mm from the valve


engraved content

FPJ-V25-A1-L3
FLGXXXXXXXXX


Hydraulic schematic diagram

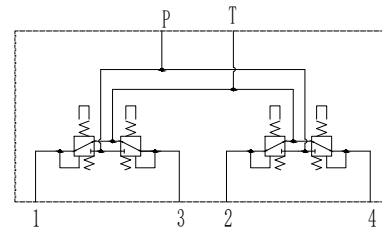



switch wiring

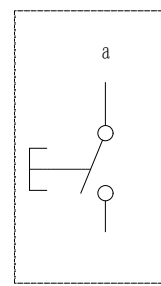


2, 4 hole Displacement-pressure curve

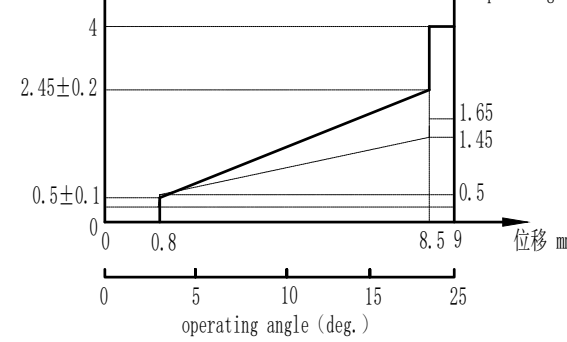

1, 3 hole Displacement-pressure curve

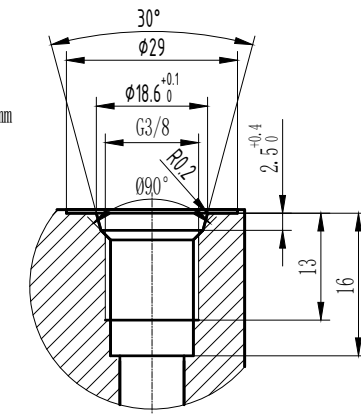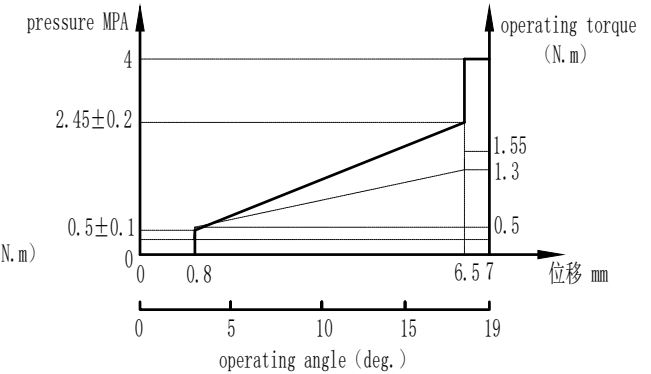

1, 2, 3, 4, T port

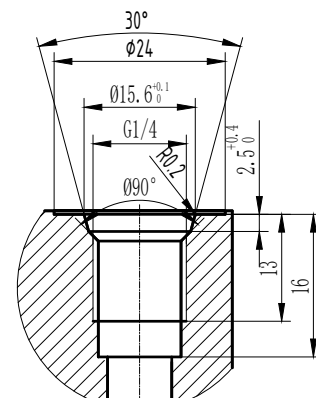

P port

Technical Information:

- Maximum Pressure: 50 bar
- Preset Pressure: 35 bar
- Rated Flow: 15 L/min
- T Port Back Pressure: 3 bar
- Button switch rating: 3A

- Oil: Mineral oil
- Viscosity Range: 10~380 mm²/s
- Oil Temperature: -20℃~80℃
- Cleanliness: NAS Level 9

						FPJ-V25-A1-L3			 Ningbo Flag-up Hydraulic flag-up
mark	Number	changed file number	signature	date					left handle
designer			approver						
inspector						pattern mark	weight	Proportion	810900278
craft							2.5KG	1:1	
standard			date	2022/10/18	version	I	visual angle		